

DATASHEET

# DENSITÉ 3+ XIP-3911-IO Multichannel SDI/IP Gateway Application for XIP-3911 and XIP-3901



SDI/IP gateway application for the software-defined platforms Densité 3+ XIP-3911 and XIP-3901.

The XIP-3911-IP application from Grass Valley® is a high-performance, versatile gateway which can encapsulate or de-capsulate up to 16 SDI signals (depending on format) to/from uncompressed SMPTE ST 2110. UHD support is provided for both SDI and SMPTE ST 2110, enabling a seamless transition from SDI<->IP for all system architectures. Multiple SMPTE ST 2110-30 audio flows per channel can be configured to support 1x16 channels, 2x8 channels or 4x4 channels of embedding/de-embedding to/from SDI. The high density allows 192 (96 SDI->IP and 96 IP->SDI) gateways per 4 RU Densité®

3+ FR4 frame, saving substantial rack space in high channel count environments. Its scalability through modularity is the ideal solution to address increasing content demands.

The dual 25 GbE SFP sockets allow fiber or electrical connectivity to redundant networks as per SMPTE ST 2022-7.

The XIP-3911 and XIP-3901 Agile Processing Platforms also provide long-term value by protecting a customer's CAPEX investment in current HD and UHD SDI and now IP infrastructure. The application-based licensing model adapts these

platforms to new workflows with different software applications resulting in a truly virtualized hardware environment.

The XIP-3911-IO is configured, controlled and monitored by GV Orbit® from Grass Valley, taking advantage of many features and functions specifically crafted to make IP easy. It can also be configured using the on-board HTML5 web interface and documented Rest API, and controlled via NMOS IS-04/05.

Densité 3+ FR4



4 RU

12 XIP-3911 = 192 3G Channels

Densité 3+ FR1





1 RU

2 XIP-3911 = 32 3G Channels


## Key Features

- Very high density with 16 gateways per card/192 gateways per 4 RU Densité 3+ FR4 frame
- Supports up to 8 SDI inputs and 8 SDI outputs
- Multiple SDI standards & formats supported including UHD Single Stream SMPTE ST 2110 and 12G SDI I/O
- SDI embed/de-embed of up to 4 audio flows per channel
- Flexible IP connectivity through two distinct SFP ports for optical or electrical modules:
  - 25 GbE AOC and Optical SFP
  - Both FEC74 (CL74 Fire Code) and FEC108 (Reed Solomon IEEE) Forward Error Correction
  - SMPTE ST 2022-7 Class A & D seamless protection switching
- Supports IGMPv3 source-specific multicast, allowing transmission in multicast groups
- SMPTE ST 2059-1 & -2 precision time protocol
- NMOS IS-04 discovery and registration with group hints tag support
- NMOS IS-05 device connection management
- In-band or out-of-band control of NMOS
- Support of DHCP, LLDP and DNS-SD for easy IP configuration
- SMPTE ST 2110-20 video including UHD Singlestream
- SMPTE ST 2110-21 Wide/Narrow profile receivers and Narrow senders
- SMPTE ST 2110-30 PCM audio
- SMPTE ST 2110-40 metadata associated with SMPTE ST 2110-20 video stream
- Fast, clean and quiet switching via make-before-break or break-before-make
- Seamless integration with GV Orbit Control, Configuration & Monitoring software including logging & reporting
- HTML5 web-based configuration interface
- Open configuration management & monitoring with the Rest API
- Individual XIP-3911 and XIP-3901 applications licensed, purchased as needed
- Rapid switching between XIP-3911 applications

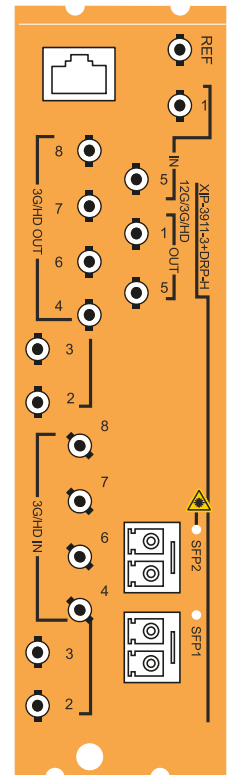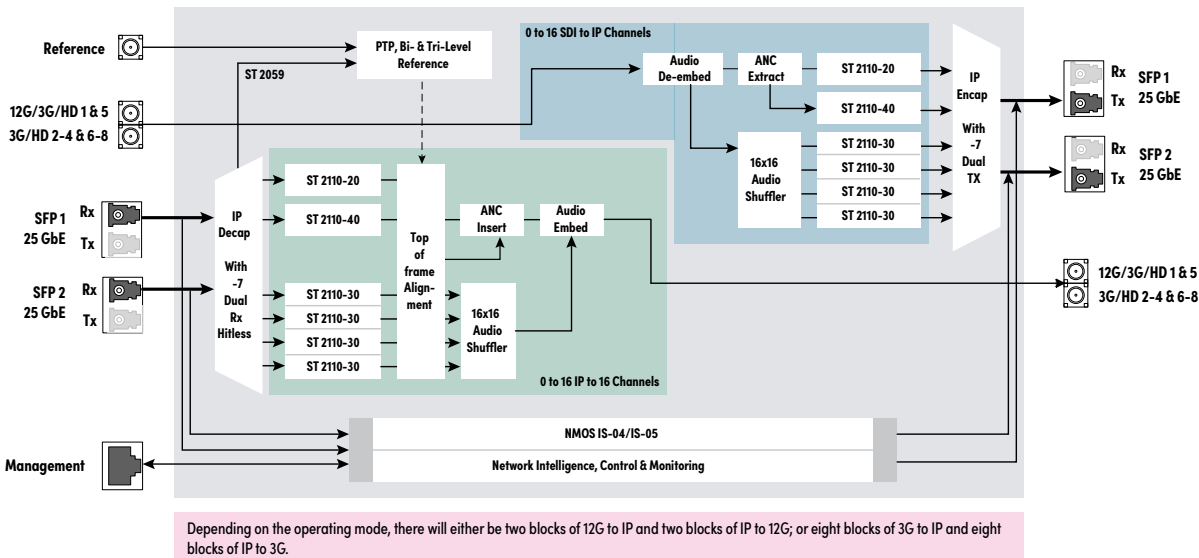

XIP-3911-3+DRP-H

# XIP Application Agility Evolution

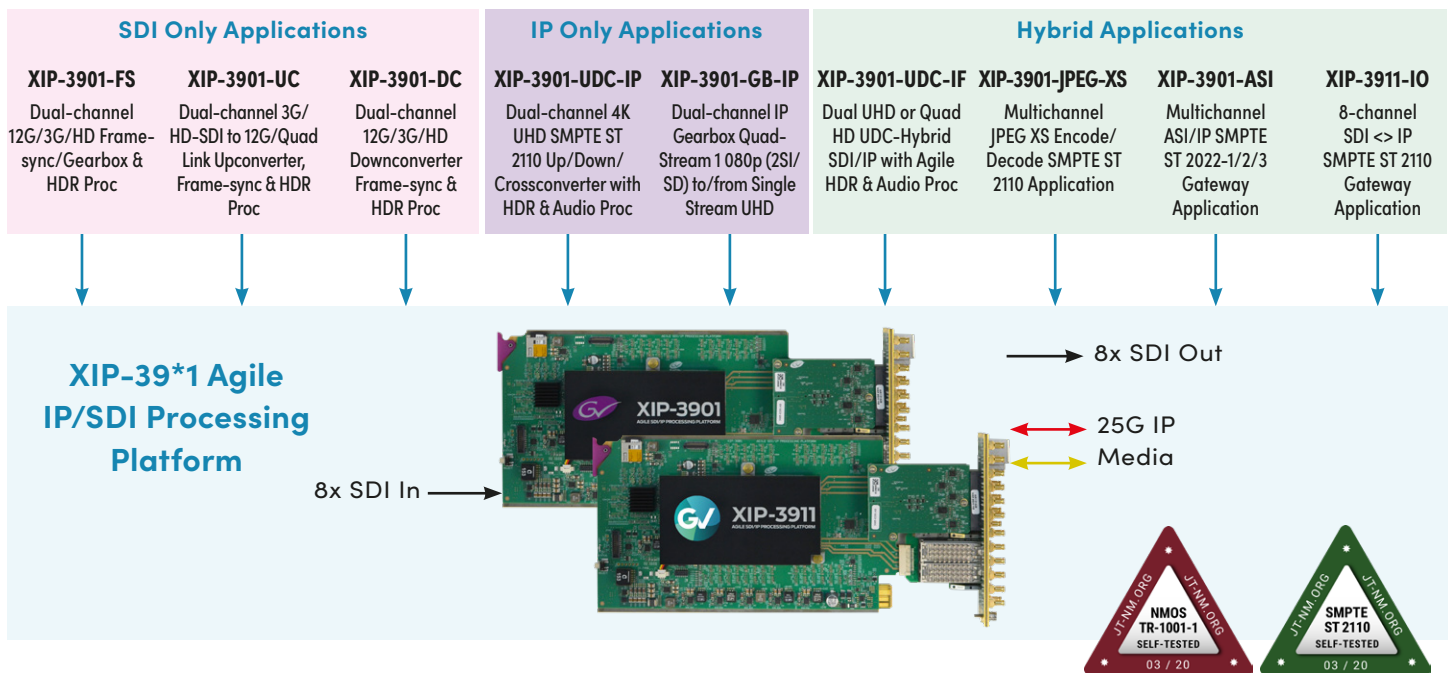

## Specifications

### SDI Only, IP Only or Hybrid (SDI/IP) (Inputs/Outputs)

**Physical:** 16 HD-BNC connectors configured as 8 inputs and 8 outputs

#### SDI Standards:

- SMPTE ST 259-C (270 Mb/s)
- SMPTE ST 292 (1.485, 1.485/1.001 Gb/s)
- SMPTE ST 424 (2.970, 2.970/1.001 Gb/s)
- SMPTE ST 2082-1:2015 (In-1, In-5, Out-1 & Out-5)

#### Cable length (Belden 1694A):

- SD: 400m (1300 ft.) at 270 Mb/s
- HD: 165m (540 ft.) at 1.485 Gb/s
- 3G: 120m (390 ft.) at 2.970 Gb/s

#### Cable length (Belden 4794):

- 12G: 60m (195 ft.) at 11.88 Gb/s

#### Ethernet Ports for Media

**Physical:** Two SFP+ sockets for active optical cable, short- and long-reach fiber

**Standard:** IEEE 802.3-2008 25 GbE

**Performance:** Up to 25 Gb of streaming per direction

#### Reference Input

**Physical:** HD-BNC/75Ω connector

**Standard:** SMPTE ST 170/SMPTE ST 318/ITU 624-4 blackburst

#### Ethernet Ports for Control

**Physical:** One electrical RJ45 port

**Standard:** IEEE 802.3 1000 Mb/s

#### Electrical

**Power:** 60W maximum

## Ordering

### Application Software

#### XIP-3911-IO

Multichannel SDI/IP Gateway application

### Densité 3+ Frame

#### XIP-3911

Agile SDI/IP processing platform

#### XIP-3911-3+DRP-H

Double rear panel for Densité 3+ with HD-BNC

### SFP+ Options (one or two SFP are needed to run this application)

#### SFP-25G-SR

SFP28 25GBASE optical transceiver MMF

#### SFP-25G-LR

SFP28 25GBASE optical transceiver SMF

This product may be protected by one or more patents. For further information, please visit: [www.grassvalley.com/patents](http://www.grassvalley.com/patents)

DS-PUB-3-1049A-EN

Grass Valley®, GV® and the Grass Valley logo are trademarks or registered trademarks of Grass Valley USA, LLC, or its affiliated companies in the United States and other jurisdictions. Grass Valley products listed above are trademarks or registered trademarks of Grass Valley USA, LLC or its affiliated companies, and other parties may also have trademark rights in other terms used herein. Copyright © 2023 Grass Valley Canada. All rights reserved. Specifications subject to change without notice.

[www.grassvalley.com](http://www.grassvalley.com) Join the Conversation at GrassValleyLive on [Facebook](#), [Twitter](#), [YouTube](#) and Grass Valley on [LinkedIn](#)